



REMOVE KNOB


1. Insert a flat screwdriver into the slot

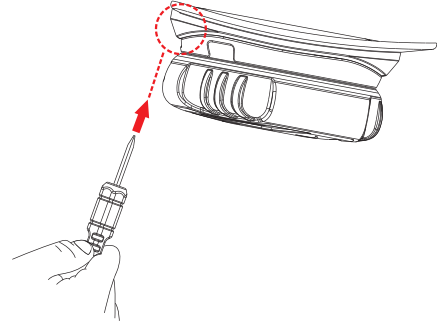

Option 2

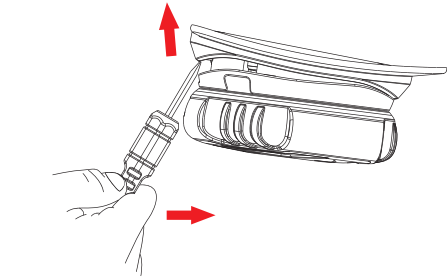

Option 1

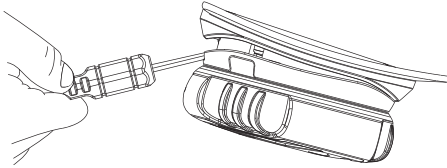


2. Push down the screwdriver to tap the clip out
3. Then, take off the dial



ONEAL


ASSEMBLY MANUAL A-A41

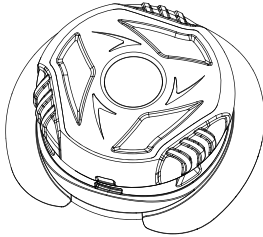


www.oneal.eu
www.oneal.com

INSERT WIRE


1. Align arrows on back of reel

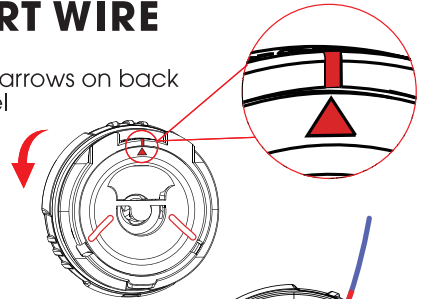


2. Thread lace into reel correctly as shown.

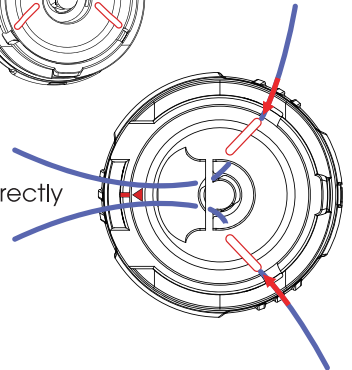

3. Tie a dial and leave a tail of 3mm

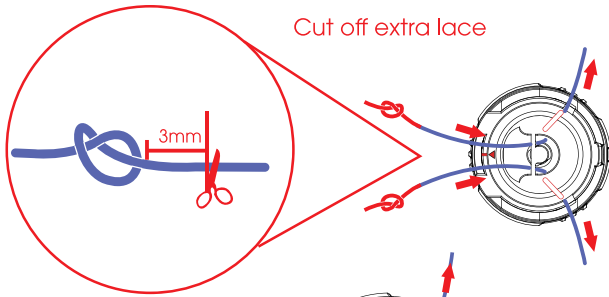


4. Pull dial into reel

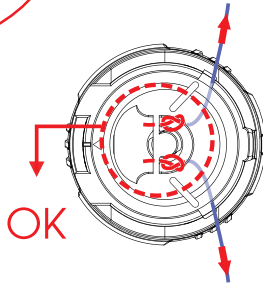


Do not pull dial into reel

Attention 1

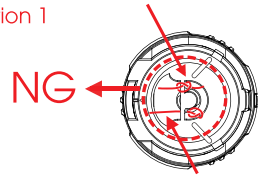


Attention 2

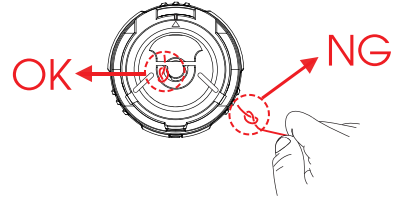

Pulling the wire intentionally out from the reel will damage the reel

PUT DIAL

1. Align the dial and slide the body into the gap at the back of the base

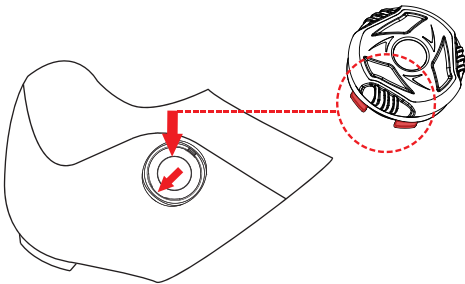

2. Push down and hear a "click" sound

